




## OUTLINE

### PIN CONFIGURATION

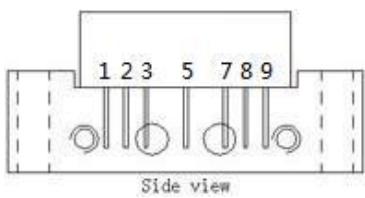

Side view

### Pin

### Description

1 input

5 +V<sub>B</sub>

9 output

2.3.7.8 common

## FEATURES ➤

- Excellent linearity
- Extremely low noise
- Excellent return loss properties
- High gain
- High reliability

## ► DESCRIPTION

Hybrid amplifier module operating over a frequency range of 47 to 1218 MHz at a voltage supply of +24V(DC) ,employing GaAs MMIC.

## QUICK REFERENCE DATA

SYMBOL	PARAMETER	CONDITIONS	MIN.	TYP.	MAX.	UNITS
G <sub>p</sub>	power gain	f=47 MHz	26.0	27.0	27.5	dB
I <sub>tot</sub>	total current consumption(DC)	V <sub>B</sub> =24V	260	270	290	mA

## LIMITING VALUES

In accordance with the Absolute Maximum Rating System

SYMBOL	PARAMETER	MIN.	MAX.	UNITS
V <sub>i</sub>	RF input voltage (single tone)	-	70	dBmV
V <sub>vo</sub>	DC Supply over-voltage(5minutes)		30	V
T <sub>stg</sub>	storage temperature	-40	+100	°C
T <sub>mb</sub>	operating mounting base temperature	-30	+100	°C

## CHARACTERISTICS

(Bandwidth 47 to 1218MHz;  $T_{mb}=25^{\circ}\text{C}$ ,  $V_B=24\text{V}$ ,  $Z_s=Z_L=75\Omega$ )

PART NUMBER			Egi12002724PG			
SYMBOL	PARAMETER	UNIT	MIN.	TYP.	MAX.	CONDITIONS
$G_P$	power gain	dB	26	27	27.5	$f = 47\text{MHz}$
$G_P$	power gain	dB	-	28	-	$f = 870\text{MHz}$
$G_P$	power gain	dB	27.5	28.0	28.5	$f = 1218\text{MHz}$
$SL$	slope cable equivalent	dB	0.5	1.0	2.0	$f = 47 \text{ to } 1218 \text{ MHz}$
$FL$	flatness of frequency response	dB	-	-	0.8	$f = 47 \text{ to } 1218 \text{ MHz}$
$S_{11} & S_{22}$	Input & output return loss	dB	-	-	-18	$f = 47 \text{ to } 1000 \text{ MHz}$
$S_{11} & S_{22}$	Input & output return loss	dB	-	-	-17	$f = 1000 \text{ to } 1218 \text{ MHz}$
CTB	composite triple beat	dB	-	-68	-63	$V_o=43\text{dBmV at } 862\text{MHz, flat, 98}$ Analog channels
CSO	composite second order distortion	dB	-	-66	-61	
XMOD	X modulation	dB	-	-67	-	$V_o=46\text{dBmV,}$ 79 analog channels plus
CTB	composite triple beat	dB	-	-68	-	
CSO	composite second order distortion	dB	-	-75	-	75 digital channels (-6dB offset)
XMOD	X modulation	dB	-	-64	-	
CIN		dB	-	-65	-	
F	noise figure	dB	-	4.5	5.0	$f=47 \text{ to } 1218 \text{ MHz}$
$I_{tot}$	total current consumption(DC)	mA	260	270	290	$V_B=+24\text{V}$

The module normally operates at  $V_B=24\text{V}(\pm 0.5)$ .

## MODULE DIMENSIONS

