



4-2\*2 Tap (2%) PLC Array Chip 极限分光比阵列波导光分路器芯片

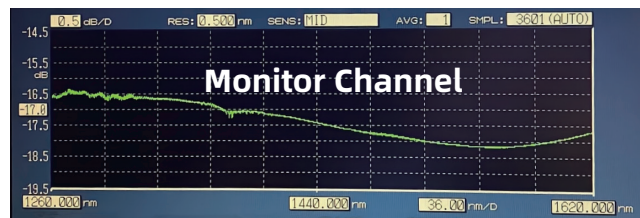

FEATURES

- 4-2\*2 tap array compact construction
- Fiber tap monitor based PLC splitter
- 1xN non-uniform for customer design
- 4-16 pcs Multi PLC Splitter Array Chips

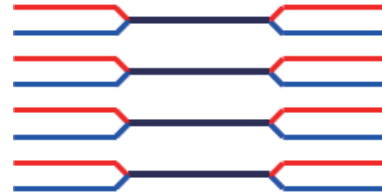

SPECIFICATIONS

Parameter		Unit	Value			
Tap Ratio		%	98:2	97:3	95:5	90:10
Operation Wavelength		nm	1260 ~ 1625			
Insertion Loss	Tap	dB	-17~ -19	-15~ -18	≤ -15.9	≤ -11.3
	Thru	dB	≤ -0.6	≤ -0.7	≤ -1.0	≤ -1.4
Return Loss		dB	≥ 50			
Directivity		dB	≥ 55			
PDL	Tap	dB	≤ 0.3			
	Thru	dB	≤ 0.1			
WDL	Tap	dB	≤ 1.3			
	Thru	dB	≤ 0.2			
Chip Size		mm	2.3(W)*2.0(H)*9.9(L)			